

# All-in-one Car Jump Starter-JS-558

6-in-1 function



Jump start



Cordless tire inflator  
(160PSI)



SOS/Strobe/Lighting



3C digital  
products charge



Blower Compression



Preset pressure



## High-precision Cylinder, High-power Motor, High Pressure up to 160PSI

Fast inflation, high air pressure  
Supports high air pressure required for cars, SUV, bicycles, etc



**160PSI**  
Max Inflation Pressure

## 2W LED lighting

Three modes: Lighting, Strobe, SOS



## Blower Function

Inflates and deflates air mattresses



Press the "Blower" button briefly to activate the inflation or deflation function.  
Press the "Blower" button again to stop inflation or deflation.

## Ultra-high Efficiency

USB-C 30W Charging Efficiency > 90%,  
Output Conversion Efficiency > 85%



USB-C 30W

About **3.5h**  
Full Charging Time



Cars

SUV

Motorcycle

Boat

# Emergency jump starter

**3250A**

Peak Current


**12V**

All Gasoline Cars

**3.8L**

Diesel


## Product Layout

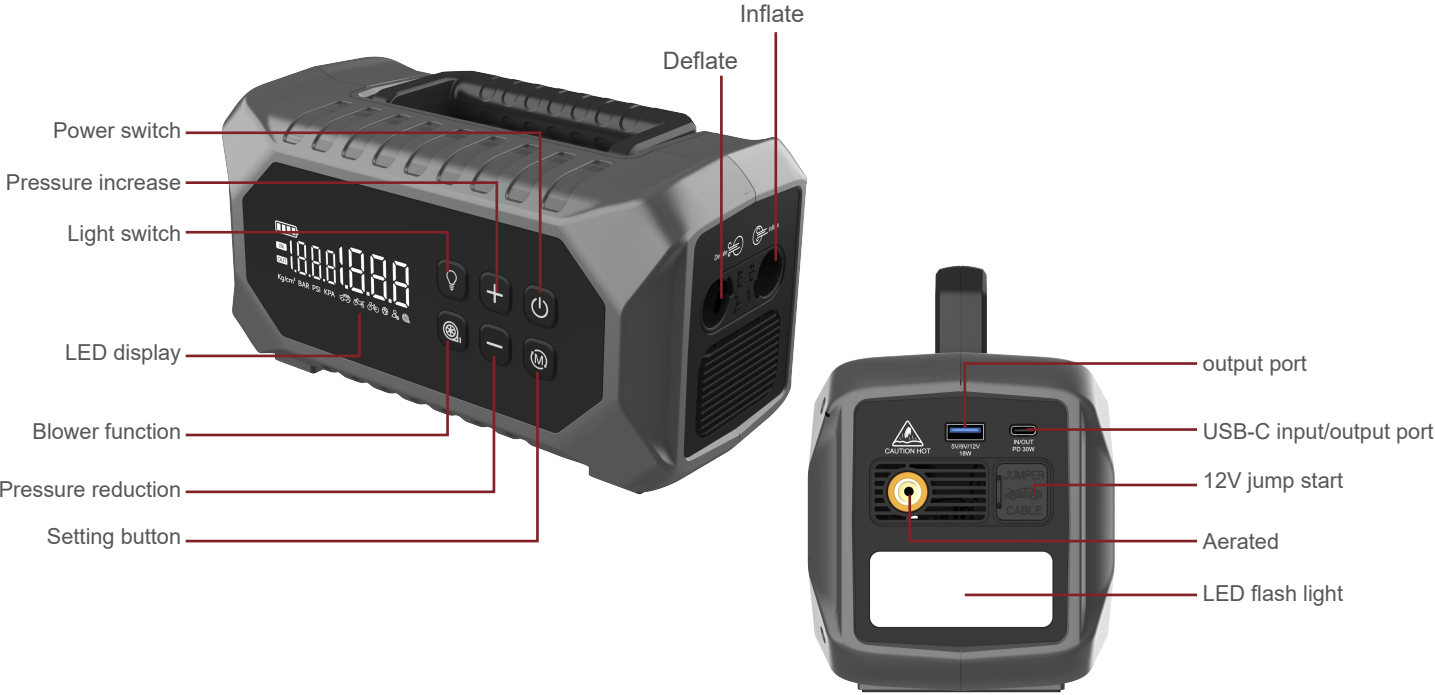

## Product Parameter

|                         |                                                                                                                  |
|-------------------------|------------------------------------------------------------------------------------------------------------------|
| Dimension:              | 230x112.5x124mm                                                                                                  |
| Weight:                 | 1.7kg                                                                                                            |
| Battery Capacity:       | 24000mAh(88.8Wh)                                                                                                 |
| Output:                 | USB-C PD30W (5V/3A;9V/3A;12V/2.5A;15V/2A;20V/1.5A);<br>Quick charge ( 5V/3A;9V/2A;12V/1.5A);<br>12V jump starter |
| Input:                  | USB-C PD30W (5V/3A;9V/3A;12V/2.5A;15V/2A;20V/1.5A)                                                               |
| Max Inflation Pressure: | 160PSI                                                                                                           |
| Air Flow Volume:        | Inflate/Deflate: 150L/min                                                                                        |
| Full Charging Time:     | About 3.5 hours                                                                                                  |
| Peak Current:           | 3250A                                                                                                            |
| Operating Temperature:  | -20°C~60°C( -4°F~140°F)                                                                                          |

## Packing and Accessories

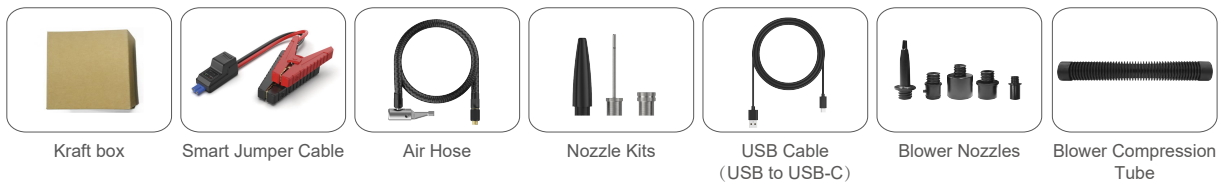

## Operation Steps



### Step 1

Connect the clamp with the jump starter via the blue port



### Step 2

Connect red clamp to the positive (+) battery terminal, black clamp to the negative (-) battery terminal



### Step 3

Start the vehicle



### Step 4

Take the clamps off within 30 seconds after finishing starting

## Safety Design Ten Protections



Short-circuit protection



Over-temperature protection



Over-current protection



Over-discharge protection



Over-charge protection



Reverse polarity protection



Over-voltage protection



Reverse-charge protection



AI software protection



Ultimate low electricity consumption protection



### Obtained Multiple Certification

FCC CE RoHS BSCI UL

National-level Manufacturing Single-Item Champion

Specialization Special and new "little giant" enterprise

National high tech enterprise

National Intellectual Property Advantage Unit

797 global patent in total

Global leader supplier of jump starter

About 30 million pcs sales volume for serving clients in 6 continents

FCC, CE, CQC, UL, RoHS certificates

IF Award, Sema Global Media award, MUSE Design Awards, China Excellent Patent Award

#### Shenzhen CarKu Technology Co., Ltd

Add: Building A, Baoke Creative Park, Lianrun Rd, Longhua District, Shenzhen, China.

Email: [info@carku.com](mailto:info@carku.com)

Web: [www.car-ku.com](http://www.car-ku.com)

Tel: 4000 222 942

卡儿酷  
Carku Science & Technology